

# XTERIOR GUARD

CODE: 113801

REVISION: 03

DATE: 05 February 2025

## GENERAL DESCRIPTION

**Dekro Xterior Guard** is a flexible, fibre reinforced waterproofing coating based on a blend of pure Acrylic polymers.

## USES AND PROPERTIES

**Dekro Xterior Guard** is an exceptionally high quality fibre reinforced flexible waterproofing coating with a low sheen.

**Dekro Xterior Guard** bridges hairline cracks, offers extremely low dirt retention, is highly washable, has good stain resistance, excellent durability and outstanding waterproofing properties.

**Dekro Xterior Guard** is ideal for applications that require outstanding durability and waterproofing.

Designed to cover hairline cracks on old and crazed plaster.

Ideal for application to exterior surfaces that are exposed to heavy weather elements.

It has a low odour and a novel additive to prevent Fungal and Algal growth. The actives within the additive have improved resistance to Alkali, UV and leaching, ensuring better long term stability and efficiency.

## TECHNICAL DATA

Binder Type	:	Blend of new generation pure Acrylic polymers
Drying Time	Surface Dry	<1 hour (at 23°C and 50% humidity)
	Hard Dry	<4 hours (at 23°C and 50% humidity)
Drying Process	:	Water evaporation
Overcoating	:	4 hours
Viscosity	:	90 - 95PP
Specific Gravity	:	1,27 ±0,05kg/litre
Mass Non-Volatile Content	:	55,8% ±3%
Volume Solids	:	43,9% ±3%
60° Gloss	:	7 - 12%
85° Sheen	:	13 - 19%
Coverage	:	6 - 7m <sup>2</sup> /litre
Dry Film Thickness	:	73 – 62 microns @ 6 - 7m <sup>2</sup> /litre
Colour Range	:	White, Pastel & Deep Colours
Clean Equipment With	:	Water
Pack Sizes	:	1 litre, 5 litre, 20 litre


Coverage/spreading rate of **Dekro Xterior Guard** depends largely on the condition and porosity of the substrate being painted and manner in which the product is applied.

## ENVIROMENTAL

**Dekro Xterior Guard** is one of Dekro's New Green Generation Products, labelled with the Dekro Daisy indicating that it is friendly to both us and our environment.

It has been specifically formulated to contain minimal levels of any harmful substances including VOC's, APEO, MEG, Formaldehyde, Ammonia and Solvents.

# XTERIOR GUARD

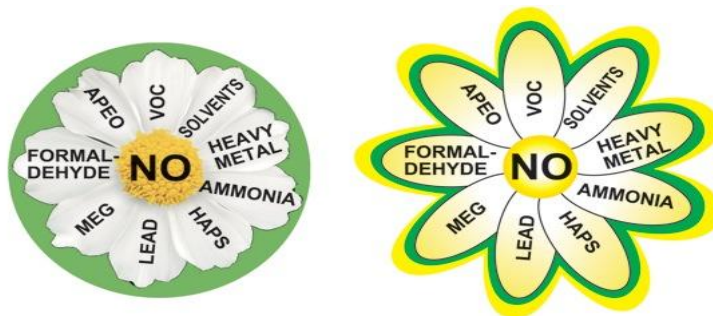

## APPLICATION

Correct surface preparation is essential for good product performance and all surfaces should be prepared as per the standard Dekro Preparation Specifications. Copies of these are available on request from Dekro Paints or can be downloaded from our website – [www.dekro.co.za](http://www.dekro.co.za).

Do not apply when ambient temperatures are  $<4^{\circ}\text{C}$  or  $>40^{\circ}\text{C}$ .

After correct surface preparation, prime with the recommended primer, then stir thoroughly and apply a minimum of 2 coats of **Dekro Xterior Guard** by brush, roller or spray at the specified spread rate. Allow to dry between coats as per technical data.

## SAFETY INSTRUCTIONS

Always keep out of reach of children and animals.

Wear a suitable dust mask and goggles when preparing surfaces.

Ensure good ventilation during application and drying.

If accidental contact with skin, wash immediately with soap and water or a recognised skin cleaner.

If accidental contact with eyes, rinse immediately with plenty of water and seek medical advice.

Harmful if swallowed. Seek medical attention and do not induce vomiting.

## GENERAL

Different surfaces and environmental conditions require specific painting systems to produce the best possible results.

It is therefore recommended that you contact a Dekro Sales representative for advice on all your painting requirements whenever possible.

## PREVENTING PROBLEMS AND GENERAL INFORMATION

**IMPORTANT:** Walls (cement plaster, concrete or masonry) must be dry before painting and should not exceed a moisture content of 10% as measured with a Protimeter Surveymaster Moisture Meter or equal.

The ambient temperature must be between  $4^{\circ}\text{C}$  and  $40^{\circ}\text{C}$  and humidity between 10% and 85%.

Excessive application thickness and/or rapid drying could lead to mud cracking.

Avoid applying under adverse weather conditions as this could result in poor product performance.

Work from corner to corner, or from a natural cut off point to another.

Do not attempt touch ups, but redo complete panels.

Always keep a wet edge and avoid downing tools during the application process to prevent lap marks and variances in colour or texture.

To ensure consistent appearance ensure that the batch numbers on all containers used are the same.

Where batch numbers on containers differ, intermix containers before use.

# XTERIOR GUARD

## CLEANING, STORAGE AND DISPOSAL

Remove as much paint as possible from application equipment and wash immediately after use with water. Close containers tightly after use and store in a cool well-ventilated area. Do not empty contents or wash water into drains or water courses. When disposing please follow local authorities regulations and recycle the container after use.

Technical Data Sheet



DEKRO  
IS THE ARCHITECTS CHOICE

The technical data furnished is given to the best of our knowledge based on controlled laboratory tests under ideal application conditions. No guarantee of any performance characteristic is therefore given or implied and we do not hold ourselves responsible for any consequential damage of whatsoever nature that may arise from use of our products. In the event of a proven product fault our liability will be limited to the replacement of the product only. It is the user's responsibility to confirm the currency of product data sheets.