
PAINTER'S PAL
PAINT & ACCESSORIES

MULTI PURPOSE PRIMER



MULTI PURPOSE PRIMER FOR VARIOUS SUBSTRATES



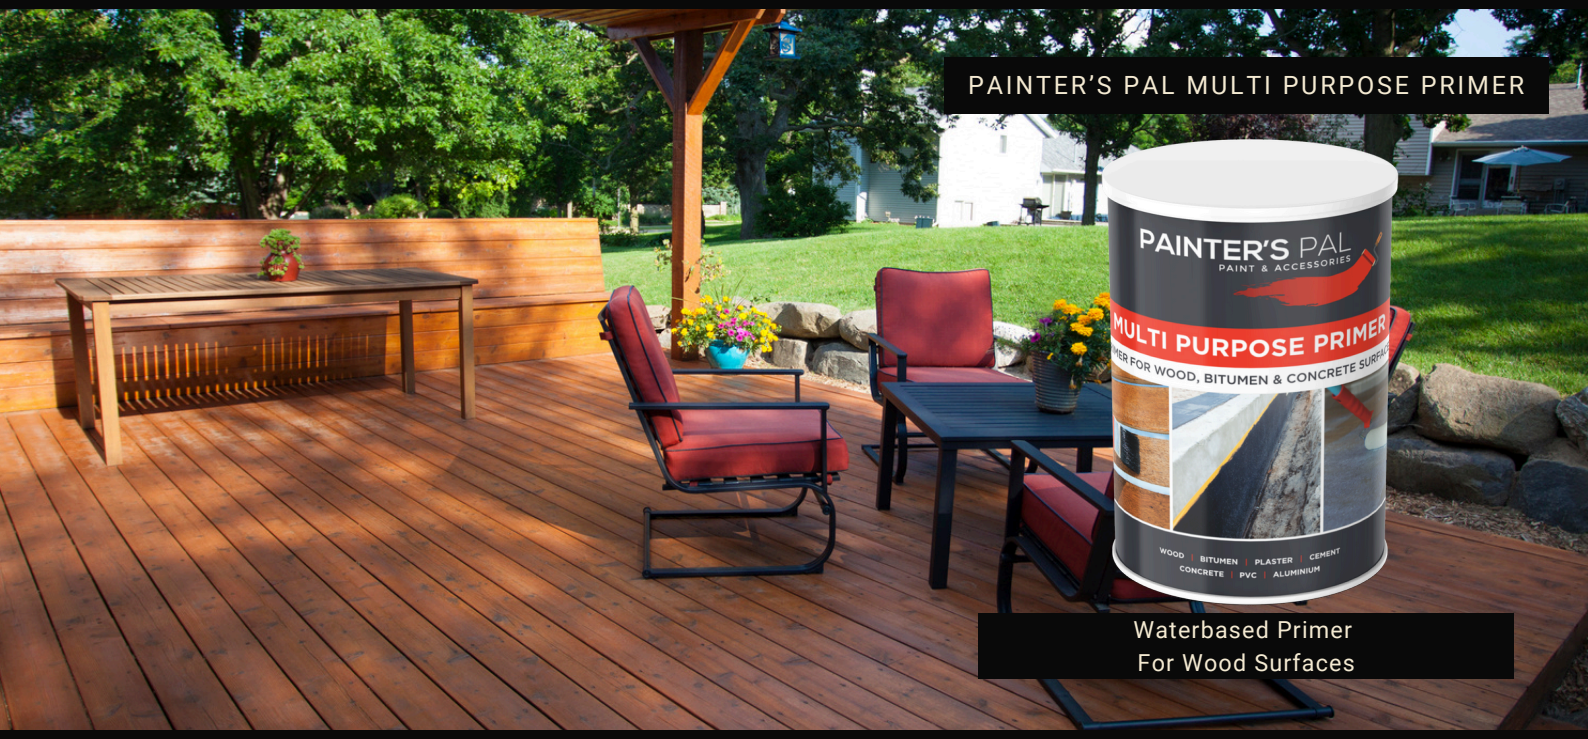





USES AND PROPERTIES:
Painter's Pal Multi Purpose Primer Self-cross-linking acrylic paint with special adhesion promotion to different substrates.

TECHNICAL DATA:

Binder Type	**Acrylic Emulsion, Non-toxic**
Drying Time	**Surface Dry: <1/2 hour (at 23°C and 50% humidity) Hard Dry: <2 hours (at 23°C and 50% humidity)**
Drying Process	**Water Evaporation / Coalescing**
Over coating	**>4 hours**
Viscosity	**90- 100 KU**
Specific Gravity	**1,05 ±0,05kg/litre**
Non-Volatile Content	**42% ±3%**
Volume	**45% ±3%**
Gloss	**Satin Sheen**
Coverage	**8 - 10m²/litre**
Dry Film Thickness	**40 microns @ 8m²/litre**
Clean Equipment With	**Water**
Colour Range	**Clear**
Pack Sizes	**Pack Sizes : 5Ltr**

SCAN FOR

TECHNICAL DATA SHEET

Coverage/spreading rate of Painter's Pal Multi Purpose Primer depends largely on the condition and porosity of the substrate being painted and manner in which the product is applied.

Correct surface preparation is essential for good product performance and all surfaces should be prepared as per the standard Dekro Preparation Specifications.
Copies of these are available on request from your Dekro Paints or can be downloaded from our website –www.dekro.co.za.
Do not apply when ambient temperatures are <4°C or >40°C. After correct surface preparation, then stir thoroughly
and apply a minimum of 2 coats of Painter's Pal Braai Paint by brush, roller or spray at the specified spread rate. Allow to dry before over coating as per technical data.

MULTI PURPOSE PRIMER

MULTI PURPOSE PRIMER - COMMON PROBLEMS AND SOLUTIONS

PAINT ADHESION ISSUES

POOR PREPARATION AND CLEANING OF SURFACE. REMOVE BACK TO SUBSTRATE AND REPEAT PROCESS

SUITABLE SURFACE

ALWAYS CHECK SUITABILTY OF SURFACE BY COMPLETING A SMALL SECTION AND ALLOW TO DRY

PAINT DELAMINATION

POOR PREPARATION. POOR SURFACE CONDITIONS. REMOVE PAINT BACK TO SUITABLE SUBSTRATE AND REPEAT PROCESS

DEKRO PAINTS 24 FABRIEK STREET KUILS RIVER
INFO@DEKRO.CO.ZA WWW.DEKRO.CO.ZA 0800 222 423 (TOLL FREE)

APPLICATIONS FOR AFRICA®