
PAINTER'S PAL
PAINT & ACCESSORIES

GARAGE FLOOR PAINT

SINGLE PACK FLOOR COATING WITH TYRE RESISTANCE



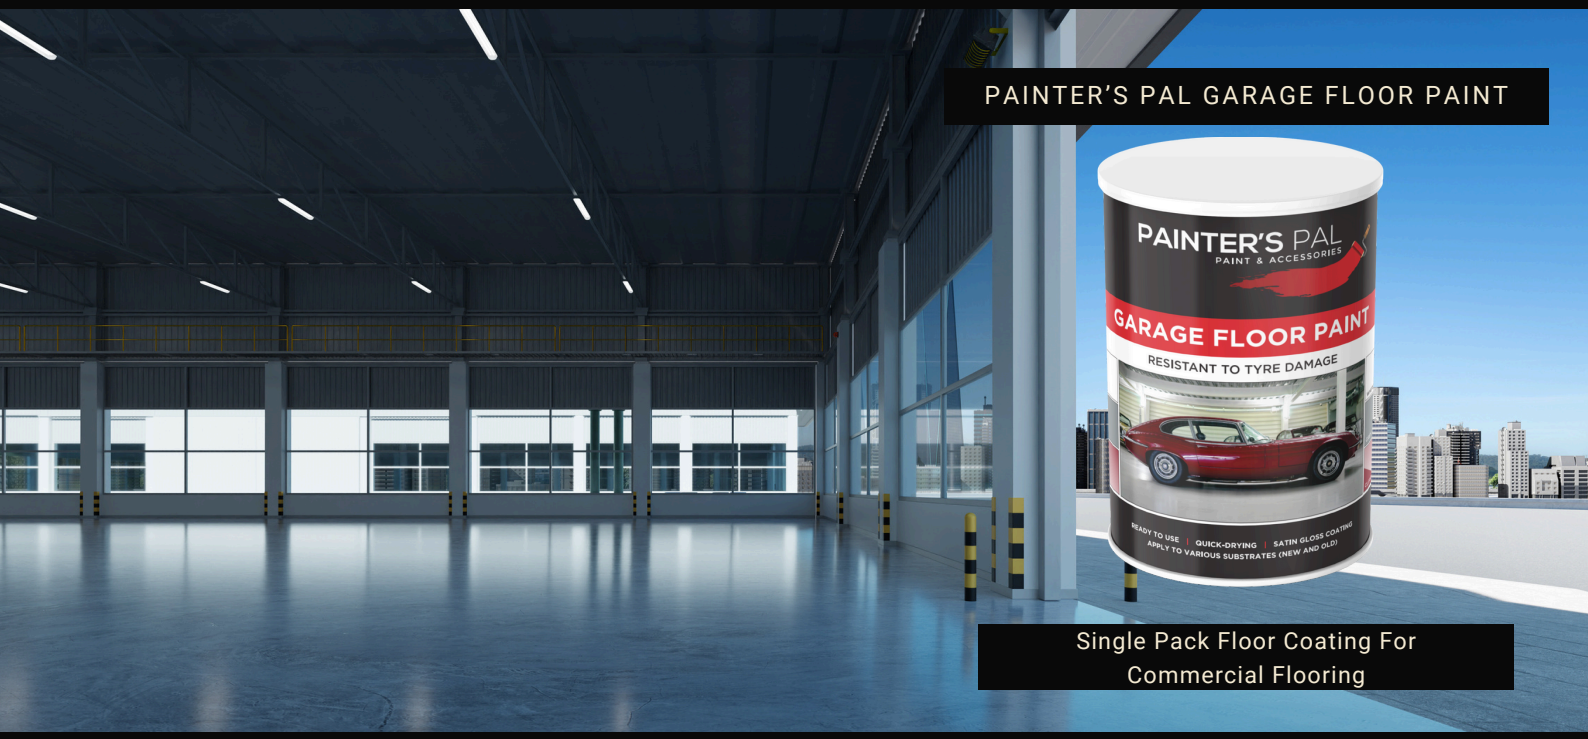

GARAGE FLOOR PAINT

USES AND PROPERTIES:
Painter's Pal Garage Floor Paint is a ready to use quick-drying Water Based Single Pack Satin/Matt or Gloss enamel, designed for application to various substrates, (new and old), based on a multi-phase, pure acrylic dispersion.

TECHNICAL DATA:

Binder Type	Acrylic Coating
Drying Time	6 hours (at 23°C and 50% humidity) Touch Dry : <30 minutes (at 23°C and 50% humidity)
Drying Process	Solvent evaporation /coalescing
Over coating	6-8 Hours
Viscosity	80 -90ku
Specific Gravity	1,205 ±0,05kg/ltr
Non-Volatile Content	45% ±3%
Volume	32% ±3%
Gloss	Satin/Matt or Gloss Sheen
Coverage	8m²/litre
Dry Film Thickness	40 microns @ 8m²/litre
Thin With	Water
Clean Equipment With	Water
Colour Range	White , Grey and Clear
Pack Sizes	Pack Sizes : 5, 20ltr

SCAN FOR

TECHNICAL DATA SHEET

Coverage/spreading rate of Painter's Garage Floor Paint depends largely on the condition and porosity of the substrate being painted and manner in which the product is applied.

Correct surface preparation is essential for good product performance and all surfaces should be prepared as per the standard Dekro Preparation Specifications.
Copies of these are available on request from your Dekro Paints or can be downloaded from our website –www.dekro.co.za.
Do not apply when ambient temperatures are <4°C or >40°C. After correct surface preparation, then stir thoroughly
and apply a minimum of 2 coats of Painter's Pal Braai Paint by brush, roller or spray at the specified spread rate. Allow to dry before over coating as per technical data.

GARAGE FLOOR PAINT- COMMON PROBLEMS AND SOLUTIONS

PAINT ADHESION ISSUES

POOR PREPARATION AND CLEANING OF SURFACE OR LATENT MOISTURE OR LAITANCE. REMOVE BACK TO SUBSTRATE AND REPEAT PROCESS

CRATERING

PRODUCT APPLIED WHERE SOLVENTS ARE PRESENT

PAINT DELAMINATION

POOR PREPARATION. POOR SURFACE CONDITIONS. REMOVE PAINT BACK TO SUITABLE SUBSTRATE AND REPEAT PROCESS

DEKRO PAINTS 24 FABRIEK STREET KUILS RIVER
INFO@DEKRO.CO.ZA WWW.DEKRO.CO.ZA 0800 222 423 (TOLL FREE)

APPLICATIONS FOR AFRICA®